

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06K 19/06	A1	(11) International Publication Number: WO 00/08596 (43) International Publication Date: 17 February 2000 (17.02.00)
(21) International Application Number: PCT/EP99/05551 (22) International Filing Date: 31 July 1999 (31.07.99) (30) Priority Data: 98810755.3 6 August 1998 (06.08.98) EP (71) Applicant (for all designated States except US): SICPA HOLD- ING S.A. [CH/CH]; Avenue de Florissant 41, CH-1008 Prilly (CH). (72) Inventors; and (75) Inventors/Applicants (for US only): MÜLLER, Edgar [CH/CH]; 28, avenue de Florimont, CH-1006 Lausanne (CH). ROZUMEK, Olivier [FR/CH]; Champ-Riond, CH-1609 St. Martin (CH). BLEIKOLM, Anton [AT/CH]; Chemin de la Crausaz 12, CH-1024 Ecublens (CH). (74) Agents: HEPP, Dieter et al.; Hepp, Wenger & Ryffel AG, Friedtalweg 5, CH-9500 Wil (CH).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: INORGANIC SHEET CARRYING SYMBOLS FOR MAKING PIGMENTS

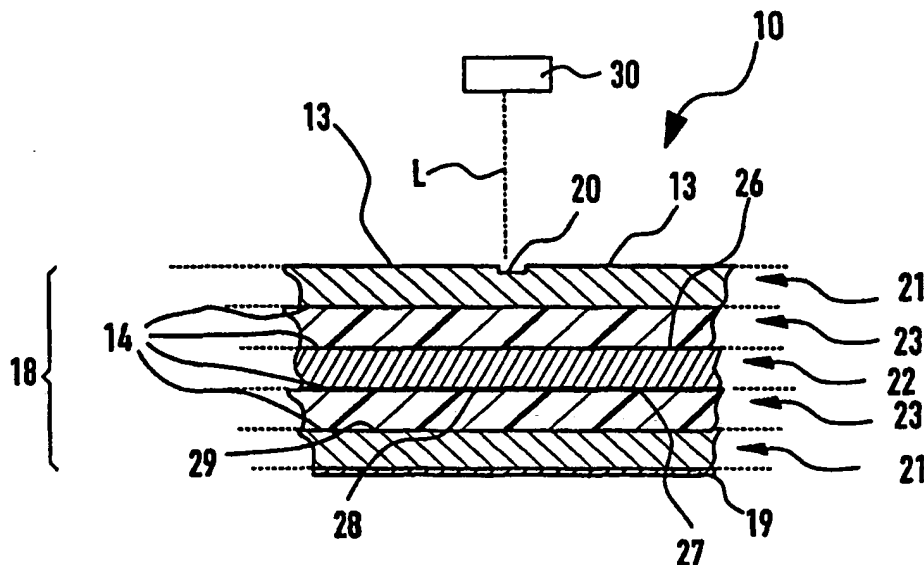

(57) Abstract

Inorganic sheets (10) of at least two superposed layers are provided with one or more symbols (20) which have a size of between 1 and 10 μm . The inorganic sheet is made up into pigment flakes (15). The symbols on the pigment flakes (15) allow a tracing of compositions such as printing inks or paintings and of substrates carrying such compositions.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INORGANIC SHEET CARRYING SYMBOLS FOR MAKING PIGMENTS

The invention relates to an inorganic sheet carrying at least one symbol for making pigments of a predetermined size for the marking of articles and to a method for forming such inorganic pigments and a pigment according to the preamble of the independent claims.

The incorporation of microscopically small aluminium platelets carrying information in the form of symbols in coating compositions has already been described in US-Patent 5,744,223. The aluminium platelets are formed as embossed sections in a thin aluminium foil which thereafter is cut to platelet size. The embossed platelets serve as information carriers to hinder the unauthorised sale or theft of vehicles.

Since the aluminium platelets are silvery opaque, one disadvantage is their visible, eye-catching appearance in coating composition, particularly in printing inks having either no colour or different colours than the platelets. This makes the fact that an article has been tagged immediately obvious to any counterfeiter. On the other hand, in coating compositions which are of the same colour as the aluminium platelets the detection of embossed aluminium platelets is extremely difficult.

Applying symbols to foils by means of embossing is limited to those materials which are ductile (aluminium, plastic, etc.). It is therefore not possible to apply symbols to brittle and non-ductile materials by means of a direct embossing.

- 2 -

Another disadvantage of the embossing procedure is the risk to damage the passivating layer of the aluminium particle which protects the particles from detrimental influences such as water.

Object of the invention is to avoid the disadvantages of the prior art, particularly to provide pigments and improved means and ways to make pigments carrying improved safety features for a broad variety of applications.

It is a particular object of the present invention to provide symbol carrying pigments with matching colours with respect to the colour of the coating composition or printing ink.

It is another object to provide pigments carrying a symbol which can be easily detected within coating compositions having dark or strong colours.

It is still object to provide pigments having both overt and covert anti-counterfeiting properties.

It is a further object to provide a method for applying symbols on materials which do not have the ductility of aluminium or plastic.

It is a further object to protect any metal layer against corrosion the surface of which may have been damaged during a direct embossing process.

These objects are solved by the features of the independent claims.

In particular they are solved by providing an inorganic sheet for making pigments of a predetermined size, carrying at least one symbol, wherein the sheet comprises at least two superposed layers which are different in their physical and/or chemical composition.

- 3 -

Pigments made from inorganic sheets are usually of a flake like shape. In the context of this invention all types of lustre or effect pigment flakes which consist of at least two superposed layers and which are made from inorganic sheets are suitable. Particularly good results are achieved with pearl lustre pigments according to the definition of DIN 55943: 1993-M and interference pigments according to the definition of DIN 55944: 1990-04. Pigments having at least two layers of different colours are well suited, too.

This inorganic sheet of at least two superposed layers may be produced, for instance, by any of the known techniques for applying thin films, such as vacuum evaporation, physical vapour deposition, chemical vapour deposition, sputtering or wet processes, as described, for example, in Ullmann's Encyclopedia of Industrial Chemistry, fifth edition, volume A6, page 67, Verlag Chemie, Weinheim, Germany.

A preferred embodiment of the present invention is an inorganic sheet having a viewing angle dependent variation of colour and carrying symbols for making pigments.

Pigment flakes having viewing angle dependent variation of colour are wellknown. They are of particular interest for the incorporation into printing inks for security documents. Since the angle-dependent colour variation is not reproducible by photocopying machines, these pigment flakes provide the document with a strong security feature. The pigment flakes, their production and various applications have been already described in numerous patents, e.g. US 4,434,010, US 5,059,245, US 5,084,351, US 5,135,812, US 5,171,363, US 5,279,657.

The working principle of these optically variable pigment flakes is based on a sequence of planar thin layers which are parallel to each other with different optical characteristics. The hue, the colour shift and chroma of the pigment

- 4 -

flakes depend on the materials constituting the layers, the sequence of the layers, the number of layers and the layer thickness.

A simple inorganic sheet having a viewing angle dependent variation of colour to which symbols can be applied and which can be comminuted to pigment flakes of a predeterminable size, consists of two planar, partially reflecting, i.e. semi-transparent, metal layers which are substantially parallel to each other and which are separated by a layer of a low refractive index material e.g. SiO_2 or MgF_2 . The low refractive index material often is described as dielectric material. This type of pigment flake which is based on the Fabry-Pérot principle was first patented by Du Pont in US 3,438,796.

The terms semi-transparent, transparent, opaque, totally and partially reflecting all relate to the light in the visible range of the electromagnetic spectrum, i.e. from about 400nm to about 700nm.

A significant improvement with respect to the colour saturation (chroma) and the angle dependent colour variation was achieved by an incorporation of an opaque totally reflecting thin layer into the stack of dielectric and partially reflecting layers. This can result in a symmetric structure, having the opaque totally reflecting layer with first and second surfaces as a central layer. To achieve a symmetric multilayer stack on the first and second surface of the opaque totally reflecting layer a thin layer of a dielectric material is deposited; subsequently, semi-transparent, partially reflecting thin layers are applied on top of both of the dielectric layers. The minimum for a symmetric structure are thus five layers. However, an asymmetric stack can be produced as well, with a minimum of three layers consisting of one opaque totally reflecting layer, one dielectric layer and one partially reflecting partially transmitting layer.

- 5 -

The opaque totally reflecting layer is usually made of a metal and preferably consists of aluminium in a thickness of up to 300nm, but preferably in the range of 50 - 150nm. Gold, copper and silver are applicable as alternative metals.

The dielectric material must be transparent, with a refractive index not higher than 1.65. Usually SiO_2 or MgF_2 are deposited as a dielectric, in a thickness between 300 and 500nm.

The partially reflecting semi-transparent layer or layers may consist of a metal, a metal-oxide or a metal-sulphide. This can be aluminium, nickel, Inocel, chromium, MoS_2 , Fe_2O_3 , etc. Semi-transparency of metal layers is a function of the layer thickness. Usually the thickness of the semi-transparent layer is between 5 and 20nm.

The inorganic sheet having viewing angle dependent variation of colour is preferably produced on a supporting material, such as a flexible web of e.g. PET. In the majority of the cases a first semi-transparent layer is deposited on the flexible web. After having deposited all subsequent layers, the multi-layered coating is detached from the flexible web whereby it typically breaks into small pieces of irregular shape and size. These pieces require further grinding to achieve the desired pigment flake size, suitable for coating compositions and particularly printing inks or for incorporation into bulk material.

As already described, pigments which have a viewing angle dependent shift of colour provide documents with a strong anti-copy feature. This anti-counterfeiting feature is further enhanced by applying symbols on at least one of the layers. Moreover such pigment flakes can serve as data carriers.

The symbols are formed on at least one of the layers of the

- 6 -

inorganic she t by a local change of optical properties, preferably reflectivity. This is achieved by at least partial destruction of at least one layer.

The size and number of symbols must be chosen such as to allow a proper identification of the inscription after breaking up and grinding to the desired pigment flake size. In a first requirement the symbols must not extend over too many pigment flakes. The symbols are preferably of a size between 0,5 - 20 μ m and even more preferably of a size between 1 - 10 μ m. In the context of this specification, size means the approximate width of symbols. This size range fits with the pigment flake size, which, on average, is between 5 and 40 μ m but not greater than 100 μ m. However, the flakes can be ground down to sizes of 2 to 5 μ m without destroying their colour characteristics.

As a second requirement, a sufficient amount of the total number of pigment flakes has to carry a symbol. As a general rule not less than 1 weight-% of the total weight of pigment flakes present in an ink composition should carry a symbol in order to allow an easy and quick detection and reading of the information.

The symbols which are applied to least one of the layers of the pigment flake are readable by means of light or electron microscopy.

The optical properties, in particular of the pigment flakes showing viewing angle dependent colour variation but also of other lustre or effect pigments, allow an easy and quick localization of the position within the bulk material, coating or ink composition where to retrieve and read the inscribed information. The detection with any type of common light microscope is particularly simple if the local change of optical properties consists of a local reduction of reflectivity or a change of colour of the layer. The pigment

- 7 -

flakes can be produced in any colour, either to match with the colour of the coating composition of printing ink or to contrast with it.

Pearl lustre pigments, for example, may even be incorporated into transparent inks without adversely affecting their transparency. This is due to the small amount of pigment flakes necessary to allow marking, detection and reading. The smallest amount of pigment flakes possible is about 1 weight-% of the total weight of a coating composition or printing ink.

More than one symbol can be applied to the pigment flakes. In a preferred embodiment of the invention, the symbol consists of a sequence of alphanumeric characters and/or logos and/or digital information. Such a sequence may be used to inform e.g. on the final user, the place of manufacture, the manufacturing serial number etc.

The symbols can particularly easily be applied by at least partial ablation of a layer by a short wavelength, high power laser having a wavelength not longer than 12 μm and preferably not longer than 1.5 μm . In particular, a UV excimer laser or a Nd-Yag laser in high power, pulsed mode is used, and the symbols are "punched" shot by shot onto the surface of the layer by means of a projection mask and corresponding optics. A surface area of up to 3 cm^2 can be marked per shot, and up to 400 shots per second can be fired with current models of such excimer lasers.

Alternatively, a continuous wave (CW) laser, coupled to a processor controlled deflecting unit of known technology, could be used to inscribe the symbols onto the layer surface. The inscription process is, however, more time consuming than the punching operation, and industrial production speeds are not easily achieved.

- 8 -

At short wavelengths, especially in the UV, laser ablation works by direct breaking of chemical bonds. In most cases the process results in an atomization of the ablated matter, rather than in heating the substrate to evaporation temperatures. This adds an advantage to the method of the present invention: the substrate is not exposed to excessive heat.

According to the present invention, symbols are applied to at least one of the layers of the inorganic sheet. This can be the two outer surfaces of the outer layers of the sheet or even one of the inner surfaces. At least one symbol can be applied during the manufacture of the sheet.

In the context of this specification inner surfaces are formed within the stack at the interface between two adjacent layers which are different in their physical or chemical characteristics. The outer surface is either the interface between one of the two last layers in the stack and the surrounding medium or the interface between the last layer having a function with regard to the special optical characteristic of the pigment flake, e.g. colour and chroma, and a layer having mere protective function.

The depth of the symbols can be adapted, i.e. limited to the thickness of one layer. However, an extension to the underlying layer is also possible. The symbol can be directly applied to the material prior to depositing the next layer or layers. Additionally the symbol can be applied to more than one of the layers.

Instead of forming the symbols by means of laser radiation, symbols can be applied by other means such as by embossing or printing. In a preferred embodiment, this is achieved by embossing the flexible web. When the material is deposited on the web, the embossed symbols are transferred to the first and subsequent layers. But as a matter of fact the surface of the layers will be levelled the more layers are superposed.

- 9 -

The symbol may also be created on the flexible web by means of any deposition technique including micro-printing.

Independently of the method used to apply the symbols onto the flexible web, the first layer of the multi-layered stack deposited thereon have the reverse of the symbols carried by the web.

In a further, alternative method, it is conceivable to form invisible symbols, i.e. symbols which can only be visualized by means of a special detecting device. Symbols can also consist in a local change of electric, magnetic or electromagnetic properties. It is possible to apply further layers (i.e. for protection) to the sheet after forming the symbols or to the particles after grinding. Provided the additional layers will not prevent the information from being retrieved.

The pigment flakes carrying a symbol according to the present invention may be incorporated into any type of coating composition, bulk material, and preferably into printing inks. If articles coated or imprinted with such a coating or ink composition are analyzed with an appropriate analyzing device, it is possible to read the symbols and to retrieve the information. This is especially useful for marking and authentication of bank notes, cheques, etc. or branded goods.

The information represented by the symbols applied to the pigment flakes can also be automatically retrieved for the purpose of achieving machine readability of security documents. An article carrying such a coating or the coating as such can be analyzed by means of an analyzing device, such as a microscope in the case of localised visible markings.

Any of the known printing techniques, such as gravure, flexographic, offset, letterpress or screen printing may be applied in connection with ink containing pigments according to the present invention which will be described in detail

- 10 -

in the following embodiments and with reference to the accompanying drawings in which:

- Figure 1 is an enlarged cross-sectional view of the inorganic sheet carrying a symbol according to the present invention as shown in Fig. 8b,
- Figure 2 represents a cross-sectional view of an inorganic sheet having a viewing angle dependent colour variation and carrying symbols,
- Figure 3 is another alternative example for an inorganic sheet of Figure 2,
- Figure 4a and 4b show an enlarged view of one of the layer surfaces carrying a plurality of symbols,
- Figure 5 is a schematic view of a substrate bearing a coating according to the present invention,
- Figure 6 is an enlarged view of the substrate of figure 4,
- Figure 7 is a cross section through an enlarged view of flexible web bearing a symbol and having a first layer deposited thereon,
- Figure 8a is a schematic view of a plurality of pigment flakes made from the sheet shown in Fig. 8b according to the present invention, and
- Figure 8b shows an inorganic sheet carrying symbols.

Figure 1 shows an inorganic sheet 10 prior to grinding to pigment flakes 15 (Fig. 6 and 8). The sheet consists of a first layer 11 carrying a symbol 20 on its outer surface 13 and a second layer 12 with an outer surface 13 and an inner

- 11 -

surface 14.

Figure 2 shows a cross-section through an inorganic sheet comprising a dielectric layer 23 with a first surface 29 and a second surface 28. Deposited on both the first and second surface 28, 29 of the dielectric layer is a layer of a semi-transparent partially reflecting layer 21. The first and second surfaces 28, 29 are simultaneously inner surfaces 14 of the multi-layered stack 18. A plurality of symbols 20 is applied on the outer surface 13 of the outer layer 21 and on the inner surface 14 of the outer layer 21.

Figure 3 shows schematically a method of creating symbols on a sheet 10 according to the present invention. An inorganic sheet 10 is formed on a flexible web 19, comprising a first partially reflecting layer 21, on the flexible web 19 a dielectric layer 23 with first and second surfaces (29, 28), a totally reflecting layer 22 with first and second surfaces (26, 28), a further dielectric layer 23 and a second partially reflecting layer 21.

More specifically an inorganic sheet was formed on a symmetric PET-web 19, with layers of Cr (20nm) 21, MgF_2 (400 nm) 23, Al (60nm) 22, MgF_2 (400 nm) 23, Cr (20 nm) 21.

Symbols 20 were created on the inorganic sheet 10 by means of a "Lambda Physics" KrF excimer laser 30 at 248 nm. This laser can deliver pulse energies to 550 mJ/cm^2 with pulse rates up to 400 Hz. Symbols 20 were "punched" into the outer surface 13 of the partially reflecting layer 21 of the inorganic sheet 10, using single laser shots of 200 mJ/cm^2 . This energy is sufficient to ablate the surface chromium layer 21. Symbols 20 of $5,4 \mu\text{m}$ in height were perfectly readable under the microscope.

Figures 4a and 4b show an enlarged section of the symbol carrying surfaces (13, 14) of the inorganic sheet 10. The

- 12 -

symbols 20 in 4a are 11.4 μm high; in 4b they are 5.4 μm high.

Figure 5 shows a substrate 25 which is covered by a coating or printing ink 16 comprising pigment flakes 15. The section A of the substrate 25 shown in figure 5 is enlarged in Fig.6. The pigment flakes 15 in the coating or ink layer 16 have optically variable properties. The substrate 25 carrying such a coating or printed image comprising pigment flakes 15 can be observed under a microscope and the symbols 20 can be read. The concentration of pigment flakes 15 will determine the degree of coverage of the substrate. The pigment flakes 15 have been made from a sheet 10 (Fig. 3) carrying as symbols 20 the imprint "SICPA" as manufacturer identification, "1997" to identify the year of manufacturing and "1201" as a lot number. Statistically, all complete information will be contained in a certain number of pigment flakes even if some of the flakes contain only part of an individual symbol 20.

Figure 7 shows an enlarged view of a flexible web 19 bearing a symbol 20 produced by micro-embossing or micro-printing. Deposited thereon is a first layer 11 which bears the symbol 20 in an inverse way.

Figure 8a shows a plurality of pigment flakes 15 obtained by detaching and grinding the inorganic sheet 10 of figure 8b to the desired particle size. The pigment flakes 15 have a size such that they can comprise a number of symbols 20, typically 2 to 15 symbols.

Claims

1. Inorganic sheet(10) for making pigments of a predetermined size carrying one or more symbols (20) characterized in that the sheet comprises at least two superposed layers (11, 12) having different chemical compositions and/or physical properties.
2. Inorganic sheet (10) according to claim 1 having a viewing angle dependent shift of colour and comprising a stack of at least one layer of a low refractive index material (23), said layer having first (28) and second surfaces (29) and at least one semi-transparent partially reflecting layer (21) on each of the surfaces (28,29) of the low refractive layer (23).
3. Inorganic sheet (10) according to claim 1 comprising a stack of at least one opaque totally reflecting layer (22) with first and second surfaces (26, 27), said totally reflecting layer having deposited a layer of a low refractive index material (23) on at least one of the surfaces (26, 27), at least one of said layers of low refractive material (23) being superposed by one semi-transparent partially reflecting layer (21).
4. Inorganic sheet (10) according to one of the claims 1 to 3 characterized in that one or more symbols (20) are formed by a local change of optical properties, preferably reflectivity in at least one layer.
5. Inorganic sheet (10) according to one of the claims 1 to 4 characterized in that one or more symbols (20) are formed by at least partial destruction of at least one layer.
6. Inorganic sheet (10) according to one of the claims 1 to 5 characterized in that one or more symbols (20) are

- 14 -

formed by at least partial ablation created by a short wavelength laser in a wavelength range not to exceed 1.5 μm .

7. Inorganic sheet (10) according to one of the claims 1 to 4 characterized in that one or more symbols (20) are formed by embossing transfer to at least one of the layers (11, 12).
8. Inorganic sheet (10) according to one of the claims 1 to 7 characterized in that at least one symbol (20) is on the outer surface (13) of the outer layer (11, 12, 21).
9. Inorganic sheet (10) according to one of the claims 1 to 7 characterized in that at least one symbol (20) is on at least one of the inner surfaces (14) of the multi-layered sheet (10).
10. Inorganic sheet (10) according to one of the claims 1 to 9 characterized in that at least one symbol (20) is on at least one of the inner surfaces (14) of the multi-layered stack and on the outer surfaces (13) of the sheet (10).
11. Inorganic sheet (10) according to one of the preceding claims characterized in that the symbol (20) has a size of between 0.5 to 20 μm and preferably of a size of between 1 to 10 μm .
12. A method of making inorganic pigments (15) carrying at least one symbol (20) comprising the steps of
 - providing a multi-layered sheet (10) of at least two superposed layers (11, 12);
 - applying at least one symbol (20) on at least one of the surfaces (13, 14) of the layers (11, 12);
 - grinding said multi-layered sheet (10) to the desired pigment flake (15) size with the flakes

- 15 -

being in a range of 0.5 to 100 μm , preferably in a range of 5 to 40 μm .

13. A method for making inorganic pigments (15) carrying at least one symbol (20) showing a viewing angle dependent shift of colour comprising the steps of
- (a) providing a flexible web (19);
 - (b) creating a multi-layered inorganic sheet (10) on said web (19) by depositing thereon a semi-transparent partially reflecting layer (21), a layer of a low refractive index material (23), superposed by an opaque totally reflecting layer (22);
 - (c) forming at least one symbol (20) on at least one of said layers (21, 22, 23);
 - (d) detaching said multi-layered sheet (10) from the flexible web (19);
 - (e) grinding said multi-layered inorganic sheet (10) to the desired pigment flake (15) size being in the range of 0.5 to 100 μm .
14. A method according to one of the claims 12 to 13 characterized in that one or more symbols (20) are formed by at least partial ablation created by a short wavelength laser in a wavelength range not longer than 1.5 μm .
15. A method according to one of the claims 12 to 13 characterized in that one or more symbols (20) are formed by micro-embossing transfer.
16. A method according to claim 15 characterized in that one or more symbols (20) are formed on the flexible web (19) prior to depositing the first layer (21), preferably by micro-embossing and/or micro-printing.
17. Pigment made by grinding an inorganic sheet (10) according to one of the claims 1 to 11.

- 16 -

18. A coating composition, preferably printing ink, comprising pigment flakes (15) according to one of the preceding claims in an amount of at least 1 weight-% of the total weight of pigments, a binder and optionally additives.
19. A substrate (25) coated with a composition according to claim 18.
20. A security document printed with a printing ink according to claim 18.

Fig.1

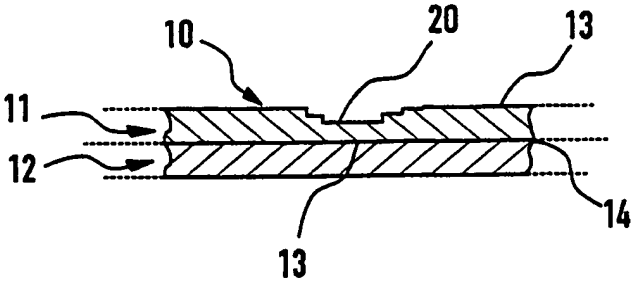


Fig.2


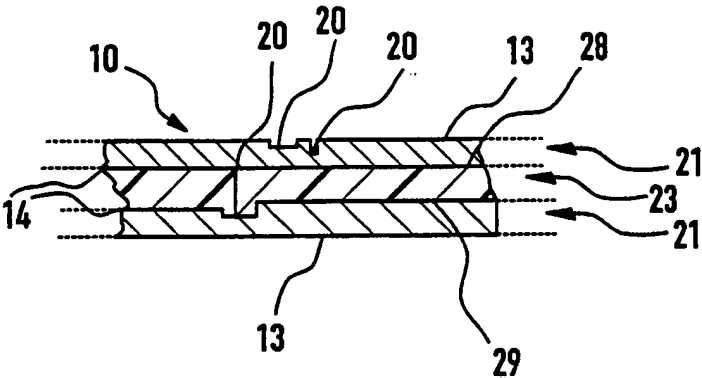


Fig.3

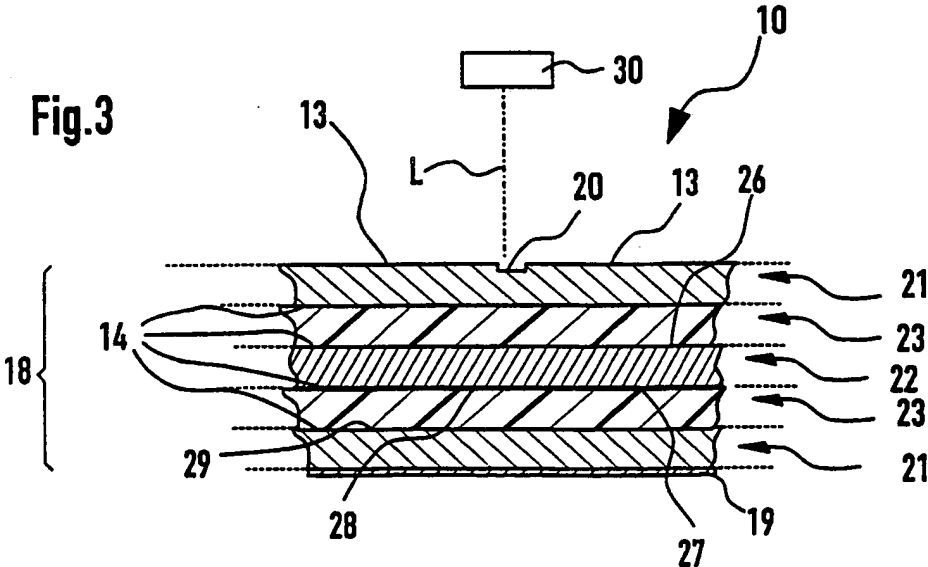

2 / 4

Fig.4a


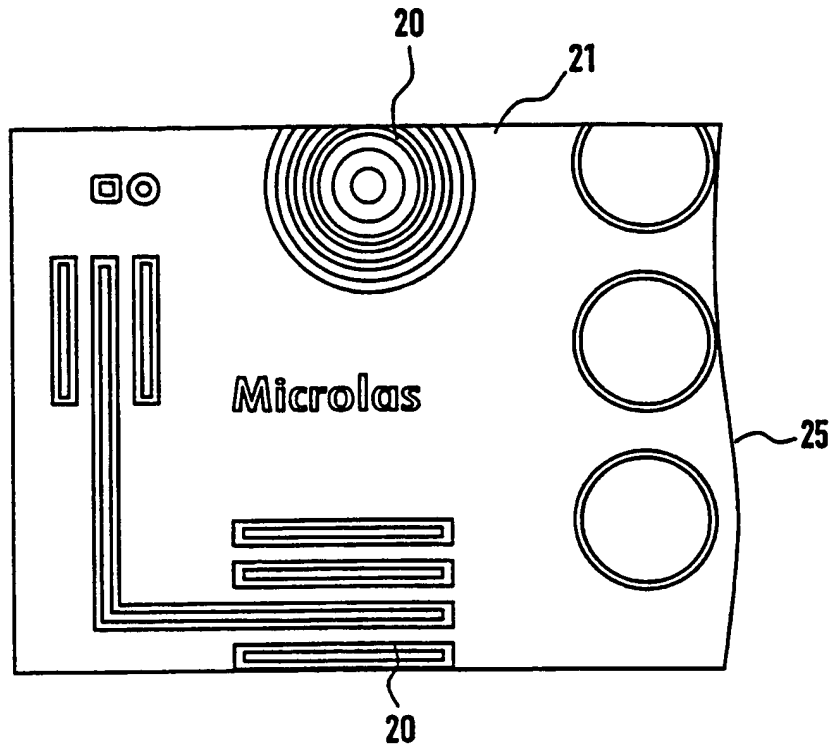


Fig4b

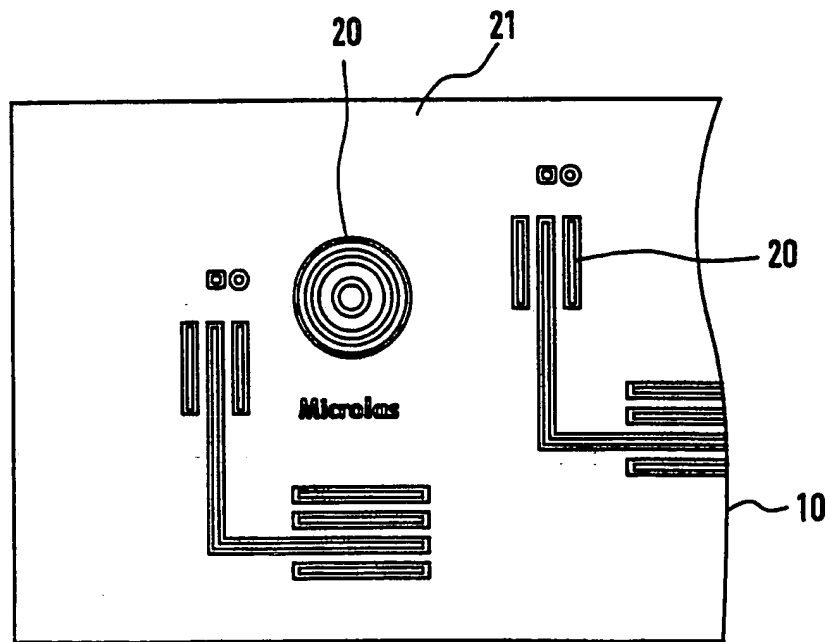

3 / 4

Fig.5

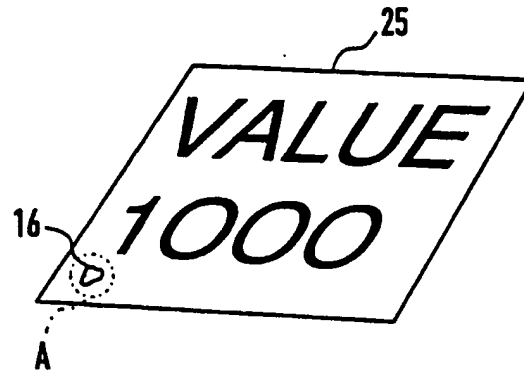


Fig.6


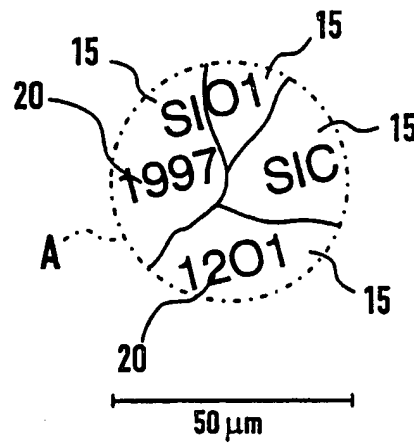


Fig.7

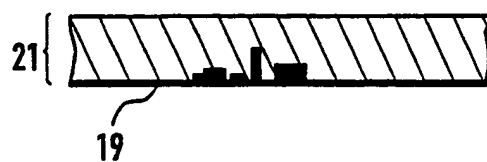

4 / 4

Fig.8a


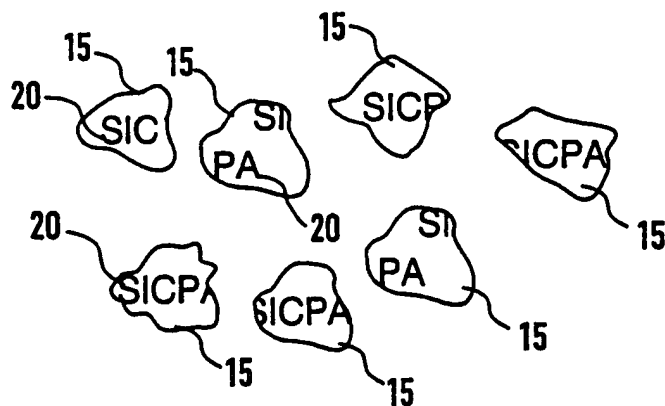


Fig.8b

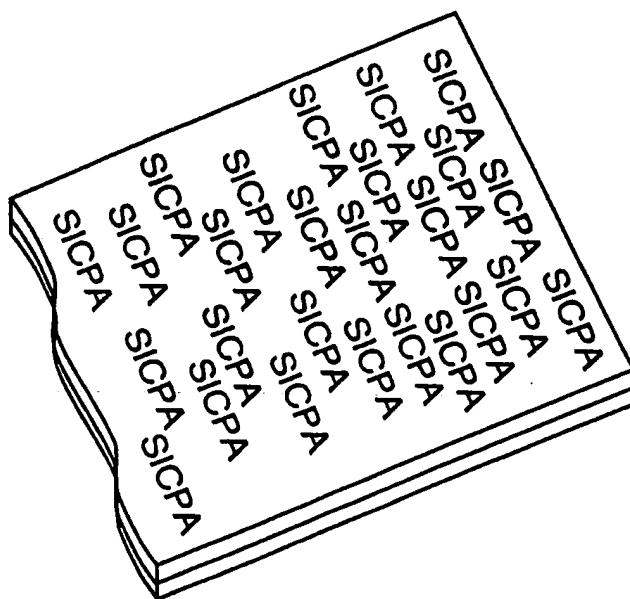

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/05551

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K19/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 434 010 A (ASH GARY S) 28 February 1984 (1984-02-28) cited in the application column 6, line 41 -column 7, line 17 column 7, line 64 -column 8, line 28 column 8, line 58 -column 9, line 27 claims; figures 3A-3E,4	1-3,17
Y		4,7, 11-13, 15,16, 18,19
Y	US 5 744 223 A (ABERSFELDER GUENTER ET AL) 28 April 1998 (1998-04-28) cited in the application column 2, line 29 -column 3, line 15 claims 1,2; figure 2A	4,7, 11-13, 15,16, 18,19
	--- -/-- ---	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 December 1999

Date of mailing of the international search report

15/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Krametz, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/05551

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 770 299 A (DANNENHAUER FRITZ ET AL) 23 June 1998 (1998-06-23) column 1, line 40 - line 52 column 2, line 30 - line 39 column 4, line 20 - line 34 figure 7 -----	1,2,4, 12,17-19
A	US 4 243 734 A (DILLON GEORGE A) 6 January 1981 (1981-01-06) column 2, line 39 -column 3, line 6 -----	1,4,12, 13,17-20
A	GB 2 289 150 A (UNIV HERTFORDSHIRE) 8 November 1995 (1995-11-08) page 3, line 11 - line 21 page 6, line 9 -page 7, line 6 -----	18-20

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/05551

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4434010 A	28-02-1984	US 5383995 A	24-01-1995
		US 5648165 A	15-07-1997
		US 5569535 A	29-10-1996
		US 5653792 A	05-08-1997
		US 5570847 A	05-11-1996
		US 5571624 A	05-11-1996
		US 5766738 A	16-06-1998
		US 5135812 A	04-08-1992
		US 5171363 A	15-12-1992
		US 5281480 A	25-01-1994
		US 5279657 A	18-01-1994
		US 5059245 A	22-10-1991
		US 5084351 A	28-01-1992
US 5744223 A	28-04-1998	DE 4335308 A	20-04-1995
		DE 59407437 D	21-01-1999
		EP 0649124 A	19-04-1995
		ES 2127320 T	16-04-1999
		JP 2655244 B	17-09-1997
		JP 8002381 A	09-01-1996
US 5770299 A	23-06-1998	DE 19541028 A	07-05-1997
		EP 0771858 A	07-05-1997
		JP 9202863 A	05-08-1997
		US 5888444 A	30-03-1999
US 4243734 A	06-01-1981	NONE	
GB 2289150 A	08-11-1995	AT 175050 T	15-01-1999
		AU 706619 B	17-06-1999
		AU 2081295 A	16-11-1995
		CA 2188386 A	02-11-1995
		DE 69506855 D	04-02-1999
		DE 69506855 T	08-07-1999
		EP 0757830 A	12-02-1997
		EP 0866435 A	23-09-1998
		WO 9529473 A	02-11-1995
		GB 2318666 A,B	29-04-1998
		JP 10504112 T	14-04-1998